


Frequency	2400-2485MHz
Gain	4dBd (≈6dBi)
VSWR	≤1.5:1
Impedance	50Ω
Polarization	Vertical
Antenna type	Omnidirectional antenna
Maximum power	20W
Connector	N female
Mounting	Mounting bracket fits 35-50mm mast tubes
Dimensions	∅23/32x330mm
Weight	445g
Color	White
Material	Mount: Aluminum, stainless steel Radome: fibre glass
Other	DC grounded

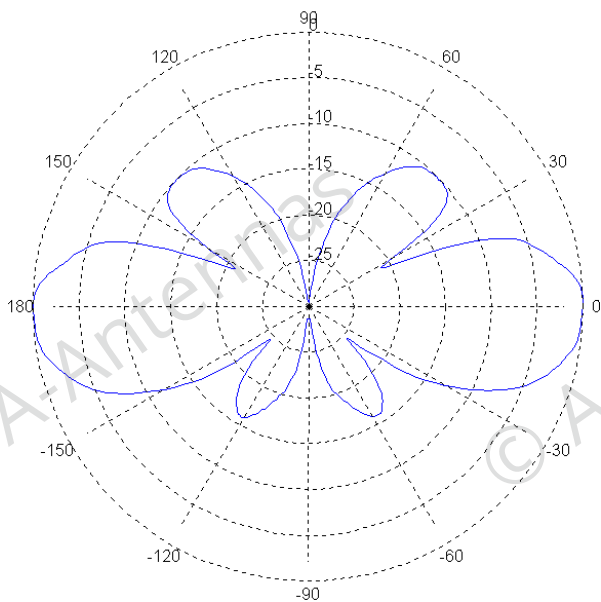

Typical radiation pattern normalised to 0 dB for E-field